

FLOS

F6500000 Aluminium

Splügen Bräu

Designed by Achille and Pier Giacomo Castiglioni, 1961



Halogen - 70W

Suspension fixture providing direct lighting. Polished and protected with transparent paint, spun aluminum reflector. Steel ceiling fitting, vacuum-formed ABS rose with gloss white finish.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8059607022450
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	Halogen
Lamp holders	E27
Ilcos	HSGSA/S
Number of heads	1
Power (W)	70

Physical

Colour	Aluminium
Length (mm)	360
Cord length (mm)	2200
Canopy dimension (mm)	41
Canopy width (mm)	89
Canopy height (mm)	89
Net weight (kg)	1.4
Package height (mm)	280
Package width (mm)	425
Package length (mm)	420
Package volume (m3)	0.05
IP internal	20

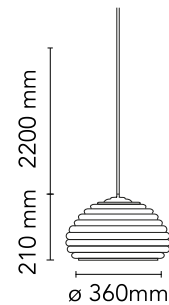

Download

Mounting instructions [↓ PDF](#)

Spare Parts [↓ PDF](#)

Photometric Files

LDT / IES [↓ LDT](#)

Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)



IP
20

<https://professional.flos.com/en/global/product/splugen-brau-f6500000/>


F6500000

©2022 Flos - P.IVA 00290820174 - 4/23/2024

professional.flos.com | info@flos.com 1/5

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Schematic light drawing



Beam Angle: 28°

h(m)	E(lx)	D(m)
1	843	0.50
2	211	1.01
3	94	1.51
4	53	2.02
5	34	2.52

Photometric

Light distribution

Symmetric

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-250
LED voltage Vf (Vdc)	null
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Bulbs




NOT INCLUDED

RF32771

LED Lamp 11W Im E27 220-
240V 2700K A60

Spare Parts

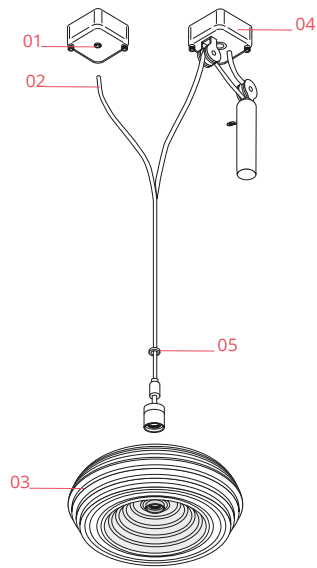

- | | | |
|-----|----------------------------|-----------|
| 01. | Complete ceiling rose | RF6500109 |
| 02. | Electric wiring 2,5mt | RF04637 |
| 03. | Zapon-varnisched reflector | RF00750 |
| 05. | Ring nut | RF06821 |

DOWNLOAD



RF6500109

Complete ceiling rose



RF04637

Electric wiring 2,5mt



RF00750

Zapon-varnished reflector



RF06821

Ring nut